



## E200 Series Projectors

Bright, energy  
efficient projectors for  
education: portable,  
easy to use and  
wireless ready

**SONY**

## Created for today's classrooms: designed with input from teachers to enhance student engagement

Bring learning to life with portable, energy-efficient E Series projectors by Sony. They're designed in consultation with teachers across Europe, teaming great picture quality with smart ECO features to drive down ownership costs. Wireless ready E Series projectors are ideal for maximising interaction and involvement with students in today's networked classrooms. Simple to set up and easy to use, they're a perfect partner throughout the busy school day.



**VPL-EW235/ VPL-EX235**

WXGA and XGA with 2700-2800 lumens colour brightness



**VPL-EW255/ VPL-EX255**

WXGA and XGA with 3200-3300 lumens colour brightness



**VPL-EW295/VPL-EX295**

WXGA and XGA with 3800 lumens colour brightness

E200 Series projectors make it easier than ever to engage pupils effectively and add colour to every lesson with crisply detailed presentations that really stand out.

Sony BrightEra™ panel technology assures clear, high contrast pictures in virtually any conditions, from daylight to darkened classrooms. Three brightness modes let teachers tailor light levels to suit different requirements, from sharing presentations in daylight to watching video with room lights off and the blinds drawn.

Plenty of interfaces allow easy connection, while a choice of Picture Modes optimises viewing with any source, whether you're viewing videos, PC documents or websites. And with extended lamp life up to 10,000 hours, downtime and maintenance costs are minimised.

Add an optional Wi-Fi module that allows students and teachers to wirelessly share homework, images and graphics from PCs, Macs and mobile devices like smartphones and tablets.

## Other Features

### Vertical Keystone Adjustment

The projectors can correct keystone distortion by +/- 30% for perfect installation adjustment to the screen. (Note that since this is an electronic correction, it will reduce the picture quality slightly.)

### Digital Zoom

With Digital Zoom, teachers can enlarge a selected area of a computer-sourced image on the screen up to four times.

### Six Picture Modes

All the projectors within the E200 Series family have six available picture modes for correct picture quality; Dynamic, Standard, Game, Blackboard, Cinema and Presentation. With six picture modes and 3 brightness modes combined, teachers can select the most suitable picture/brightness mode according to the picture source and environment for the perfect image.

### 3LCD BrightEra Technology

The Sony BrightEra inorganic TFT 3LCD panels deliver improved panel light resistance, higher resolution, high brightness and increased panel reliability.

### Smart APA (Auto Pixel Alignment)

When a computer is used as a picture source, APA automatically optimises Phase, Pitch and Shift values. These can also be adjusted manually.

### Picture Muting/Audio Muting

If there is a need to blackout the image or turn off the audio from the projector, all it takes is a single button-press on the remote control. One button will mute audio and image at the same time. There is also a separate "mute audio" button for audio-only muting.

### Audio Switcher Facility

To avoid the need for a separate audio switcher, the projector can be used to select between two audio sources, routing them via a variable audio output to the room amplification system.

### Off and Go

At the end of a presentation, teachers can turn off the power supply to the projector immediately, instead of going through a 'power down' cycle.

### Direct Power On/Off

With this function, there is no need to go through 'Standby' mode when powering up the projector. The projector can be set to activate as soon as power is supplied.

### Built-in Security Measures

The E200 Series projectors have a package of security measures, including password protection and physical anti-theft anchor points.

### Wireless ready

Add the optional IFU-WLM3 USB wireless module and connect with other devices in the classroom, from PCs, Macs, smartphones or tablets.

### Menu Input Customization

This function allows the user to customise the Input Menu information allowing users to easily understand what content source is connected to which projector input.

### USB Display

The ability to send images and audio from a universal USB Cable.

## Optional Accessories



**IFU-WLM3**  
USB wireless module




**LMP-E212**  
Replacement Projector Lamp



**442670201 (FILTER)**  
Replacement Filter

## Connector Panels


Rear connector panel for the VPL-EW235, VPL-EX235, VPL-EW255, VPL-EX255, VPL-EW295 and VPL-EX295 projectors

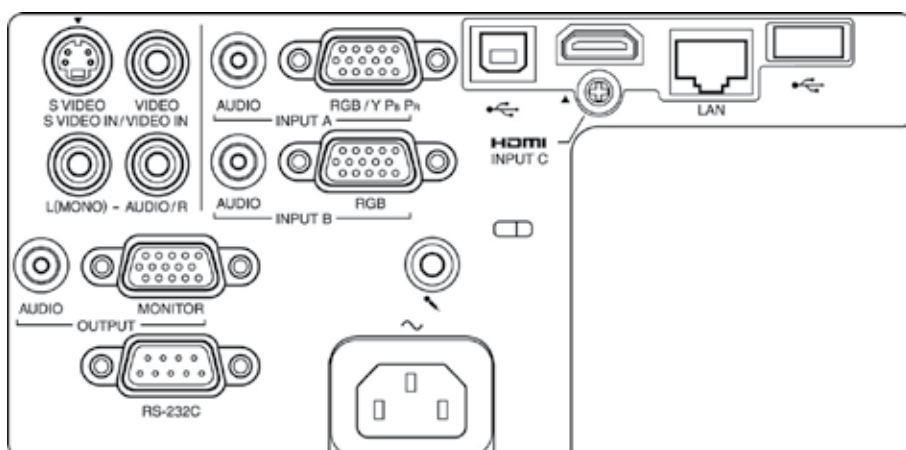


## Dimensions

## PrimeSupport

### Front Dimensions for the VPL-EW235, VPL-EX235, VPL-EW255, VPL-EX255, VPL-EW295 and VPL-EX295 projectors

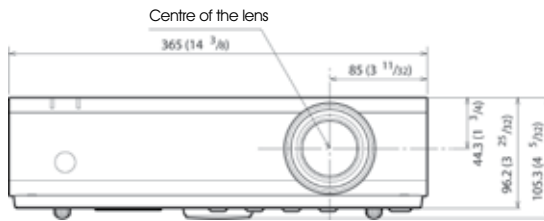

### Bottom Dimensions for the VPL-EW235, VPL-EX235, VPL-EW255, VPL-EX255, VPL-EW295 and VPL-EX295 projectors

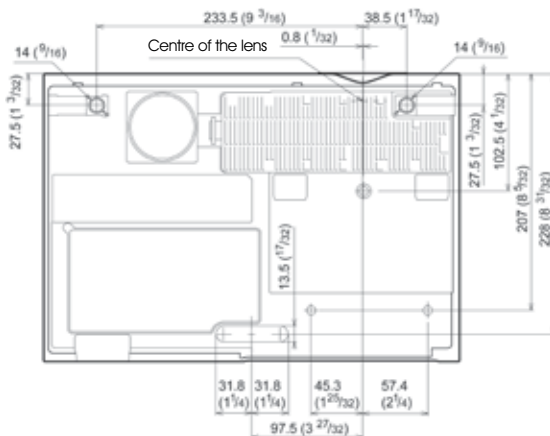

All Sony Professional's education projectors sold into the EU, Norway and Switzerland come supplied with a 3 Year projector and 3 year/3000 hour lamp cover PrimeSupport pack. This offers unique services and benefits over and above standard warranty:-

3 Year projector and 3 year/3000 hour PrimeSupport Cover.

Freephone telephone helpdesk support (00800 7898 7898) in 5 languages. Collection, repair and return anywhere in EU, Norway and Switzerland.

In addition, optional PrimeSupport Plus packs can be purchased which can further enhance the 3 year support to give extra peace of mind:-

- A 2 year extension of the standard 3 year PrimeSupport to give long-term assurance of expert support, technical assistance and repairs for 5 years from purchase date.
- Provision of a loan unit for 3 or 5 years cover to ensure minimal impact to the customer's business in case of product failure.



## Key Features

### ECO Mode Key

Teachers can easily select power-saving ECO Modes. The most energy-efficient mode is accessible through a single button-push, with further adjustments available through an easily understood menu system.

### ECO Picture Mute - (Instant Off/Instant On)

The new ECO Picture Mute feature reduces power consumption down to 30%, saving cost and lamp hours. This feature can be used in the classroom as instant off/instant on in-between classes. There is no need to power completely off and turn back on, which is time consuming and a significant problem with projectors in the classroom.

### Auto Dimming Mode

The new E200 Series projectors automatically adjust brightness depending on the image. The darker the image, the less energy used by the lamp. (Maximum 70% lamp power reduction based on the image.)

### ECO Lamp Dimming

These projectors (if this function is selected) can reduce power consumption and brightness by 10-15%. After a user pre-set time, the brightness and power consumption will reduce to 30% power usage, with instant 100% brightness returning as soon as a new signal input is detected.

### ECO Gauge

When the projector is shut down, an ECO achievement indication (gauge) appears to show the teacher how well they have used the projector. The more ECO features that have been used, the better the ECO green leaf mark. (Calculated by the use of ECO functions and actual lamp wattage.)

## Other Features

### WXGA Resolution

The VPL-EW235, VPL-EW255 and VPL-EW295 have a native WXGA (1280 x 800) 16:10 screen resolution panel, perfect for presentations direct from a laptop or PC.

### XGA Resolution

The VPL-EX235, VPL-EX255 and VPL-EX295 have a native XGA (1024 x 768) 4:3 screen resolution panel, perfect for presentations direct from a laptop or PC.

### 10,000 Hours Lamp Life

A new driving scheme reduces gap expansion which minimises brightness gradation. A new cooling system allows uniformity in the temperature of the glass bulb which prevents the glass from clouding.



## Specifications

		VPL-EW235	VPL-EW255	VPL-EW295	VPL-EX235	VPL-EX255	VPL-EX295
Display system		3 LCD system					
Display device	Size of effective display area	0.59" (15 mm) x 3, BrightEra, Aspect ratio: 16:10		0.75" (19 mm) x 3, BrightEra, Aspect ratio: 16:10	0.63" (16 mm) x 3, BrightEra, Aspect ratio: 4:3		
	Number of pixels	3,072,000 (1280 x 800 x 3) pixels			2,359,296 (1024 x 768 x 3) pixels		
Projection lens	Zoom (Manual)	X1.3	X1.6		X1.3	X1.6	
	Focus	Manual					
	Light source	High-pressure mercury lamp 210 W type					
	Recommended lamp replacement time	4,000 H / 8,000 H / 10,000 H			3,000 H / 5,000 H / 10,000 H		4,000 H / 8,000 H / 10,000 H
	Filter cleaning cycle	Max 7000 hours (Lamp mode: Low)					
	Screen size	30" to 300" (0.762 m to 7.62m)					
	Light output (White / Colour) Lamp Mode: High / Standard / Low	2700 lm / 1900 lm / 1500 lm	3200 lm / 2000 lm / 1600 lm	3800 lm / 2800 lm / 2100 lm	2800 lm / 2100 lm / 1600 lm	3300 lm / 2200 lm / 1700 lm	3800 lm / 2700 lm / 2100 lm
	Contrast ratio (Full white / Full black)	2700:1		3700:1	3300:1		
	Acoustic Noise (Lamp mode: High / Standard / Low)	38 dB / 36 dB / 30 dB					
	Speaker	16 W x 1 (mono)					
Displayable scanning frequency	Horizontal	14 kHz to 93 kHz					
	Vertical	47 Hz to 93 Hz					
Display resolution	Computer signal input	Maximum input signal resolution: UXGA 1600 x 1200 1V:60Hz (resizing display), Panel display resolution: 1280 x 800 pixels			Maximum input signal resolution: UXGA 1600 x 1200 1V:60Hz (resizing display), Panel display resolution: 1024 x 768 pixels		
	Video signal input	Video (composite), 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, Digital signals via HDMI input are 1080/60p 1080/50p					
	Color system	NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N					
	Keystone correction	Vertical: Max. +/- 20 degrees			Vertical: Max. +/- 30 degrees		
	OSD language	23-language (English, French, German, Italian, Spanish, Portuguese, Japanese, Chinese, Korean, Russian, Dutch, Norwegian, Swedish, Thai, Arabic, Turkish, Polish, Vietnamese, Farsi, Finnish, Indonesian, Hungary, Greek)					
Computer and video signal input/output	INPUT A	RGB / Y PB PR input connector: Mini D-sub 15-pin (female), Audio: Stereo mini jack					
	INPUT B	RGB input connector: Mini D-sub 15-pin (female), Audio: Stereo mini jack					
	INPUT C	HDMI (Digital RGB/Y Pb Pr, Digital Audio) HDCP Support					
	VIDEO IN	Video input connector: Pin jack, Audio: Pin jack X2 / Shared with S-Video					
	S VIDEO IN	Mini DIN 4-pin Audio: Pin jack X2 / Shared with Video					
	MONITOR OUT	Mini D-Sub 15-pin (From Input A and Input B)					
	AUDIO OUT	Stereo mini jack (variable out)					
	RS232C	D-sub 9-pin (male)					
	LAN	RJ-45 10BASE-T/100BASE-TX					
USB	Type A, Type B						
Operating temperature (Operating humidity)		0°C to 40°C / 32°F to 104°F (35% to 85% (no condensation))					
Storage temperature (Storage humidity)		-20°C to +60°C / -4°F to +140°F (10% to 90%)					
Power requirements (Approx)		AC 100 V to 240 V, 3.2 - 1.3A 50 Hz /60 Hz					
Power consumption	AC 100 V to 120 V (High / Standard / Low)	289 W / 250 W / 219 W	314 W / 250 W / 219 W	309 W / 250 W / 219 W	297 W / 250 W / 219 W	314 W / 250 W / 220 W	310 W / 250 W / 219 W
	AC 220 V to 240 V (High / Standard / Low)	278 W / 240 W / 212 W	301 W / 240 W / 212 W	298 W / 240 W / 212 W	286 W / 240 W / 212 W	301 W / 240 W / 212 W	299 W / 240 W / 212 W
Standby mode power consumption	AC 100 V to 120 V	4.9 W / 0.5 W (standby mode: Standard / Low)					
	AC 220 V to 240 V	5.1 W / <0.5 W (standby mode: Standard / Low)					
Heat dissipation	AC 100 V to 120 V	986 BTU	1071 BTU	1054 BTU	1013 BTU	1071 BTU	1058 BTU
	AC 220 V to 240 V	949 BTU	1027 BTU	1017 BTU	976 BTU	1027 BTU	1020 BTU
Standard outside dimensions		W 365 x H 96.2 x D 252 mm (without protrusion) W 365 x H 105.3 x D 252.5 mm (with protrusion)					
Mass (Approx)		Approx. 4kg / 8lb 11oz					
Supplied Accessories		Remote Commander (1), CR2025, Lithium Battery (1), Mini D-sub 15-pin cable (1), Operating Instructions (1), AC Power Cord, WEEE, EU Battery Info, Service Documentation, Quick Reference Manual (1)					
Optional Accessories		IFU-WLM3, USB wireless module, LMP-E212, Replacement Projector Lamp, 442670201 (FILTER ), Replacement Filter					

© 2014 Sony Corporation. All rights reserved. Reproduction in whole or in part without permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measurements are approximate. 'Sony' and 'BrightEra' are registered trademarks or trademarks of Sony Corporation. All other trademarks are the property of their respective owners.

Distributed by

**Nam Long Co., Ltd.**  
Tel: 8492 888 2345  
www.namlong.vn

Sony is the leading supplier of AV/IT solutions to businesses across a wide variety of sectors including, **Media and Broadcast, Video Security, Medical, Digital Cinema and Displays**. It delivers products, systems and applications to enable the creation, manipulation and distribution of digital audio-visual content that add value to businesses and their customers. With over 25 years' experience in delivering innovative market-leading products, Sony is ideally placed to deliver exceptional quality and value to its customers. Collaborating with a network of established technology partners, Sony delivers end-to-end solutions that address the customer's needs, integrating software and systems to achieve each organisation's individual business goals. For more information please visit [www.pro.sony.eu](http://www.pro.sony.eu)

Follow us on Twitter at [@SonyProEurope](https://twitter.com/SonyProEurope) / [www.twitter.com/sonyproeurope](https://www.twitter.com/sonyproeurope)

HCT\_VPL-E200\_Series\_J3155\_ENG\_21/08/2014\_v5

**SONY**